



CORNER RECORD
WARRICK COUNTY

DESCRIPTION:
SOUTHWEST CORNER NORTHWEST QUARTER
SECTION 20, T. 5 S., R. 6 W.
2nd PRINCIPAL MERIDIAN

WARRICK COUNTY SURVEYOR
KARAN HARGRAVE-BARNHILL




INDICATE CORNER REFERENCED:

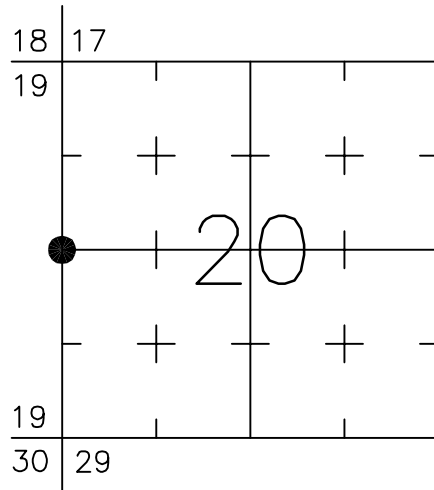

MONUMENT TYPE: REBAR
SIZE: 5/8" DIA.
DEPTH/HEIGHT: FLUSH WITH EXIST. GROUND
REFERENCE TIE DRAWING:

FOR NOTES ON CORNER HISTORY SEE REVERSE.

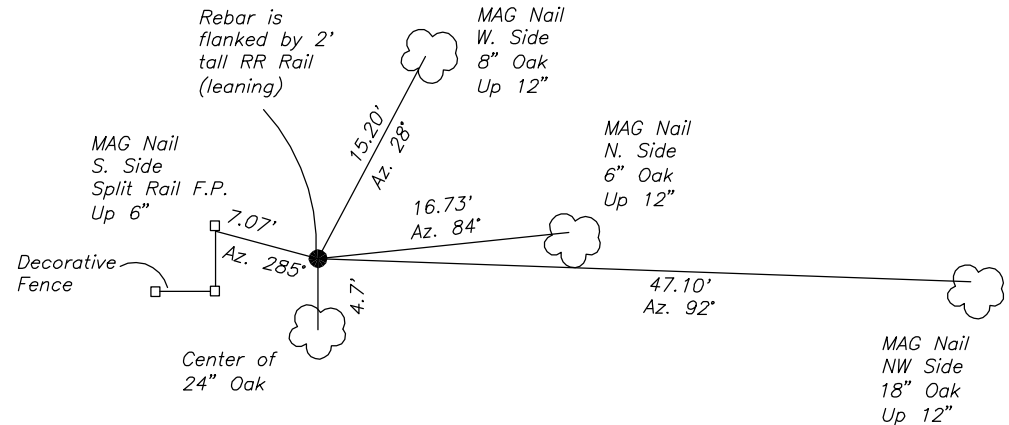

STATE PLANE COORDINATE DATA:
INDIANA WEST ZONE, NAD 83 (1997)
U.S. SURVEY FEET

X 2945313.36

Y 1026987.61

COORDINATES ESTABLISHED BY:
Bernardin-Lochmueller Assoc. by GPS
ties to HARN Station "JACKSON"
APPROVED BY:

DATE:

Co. Rd. 250 N. (Wilson Lane)
(Asph.)

REFERENCED BY: M.BADGER/G.M.BURRESS DATE: 4/14/03

APPROVED BY: P.JONES, RLS#9600016

DATE: 4/17/03

CORNER FILE CODE:
T5S-R6W-P-05

CORNER HISTORY:

CORNER FILE CODE:
T5S-R6W-P-05

ORIGINAL USPLS SURVEY: Survey by Augustus Stone, 1805.

COUNTY SURVEYOR'S BOOKS: Book 1 Pp. 121 & 122 John C. Frary WCS September 20, 1859 "Oak Post".

Book 2 P. 11 O.B. Pasco WCS November 30, 1880 (bearing trees only, monument not identified).

OTHER SURVEYS AND PLATS:

VERIFICATION OF CORNER POSITION: April, 2003; the 5/8" rebar shown was found in place. Its history is unknown. A piece of railroad rail, 24" tall but leaning, stands next to the rebar. The rebar is within 1 foot of being equidistant from a pipe marking the northwest corner and the calculated southwest corner of Section 20 (calculated using S.R. 62 road plan data). There is an uncertainty of 23' southerly due to the relative location of County Road 250N, which would generally be expected to follow approximately the quarter-section lines. Coordinates shown were obtained by a combination of rapid-static GPS and total-station traverse. For additional information refer to the Boundary Retracement Survey recorded in Doc. 2003R-006299 (Bernardin-Lochmueller Assoc. Proj. 102-0060-0SV/SV0A).

P.E. Jones 4/17/03